


व्यावसायिक परीक्षण रिपोर्ट  
COMMERCIAL TEST REPORT

संख्या/ No.: ROTAVATOR-381/2892/2022

माह/ Month: August, 2022

**THIS TEST REPORT VALID UP TO : 31<sup>st</sup> August, 2029**

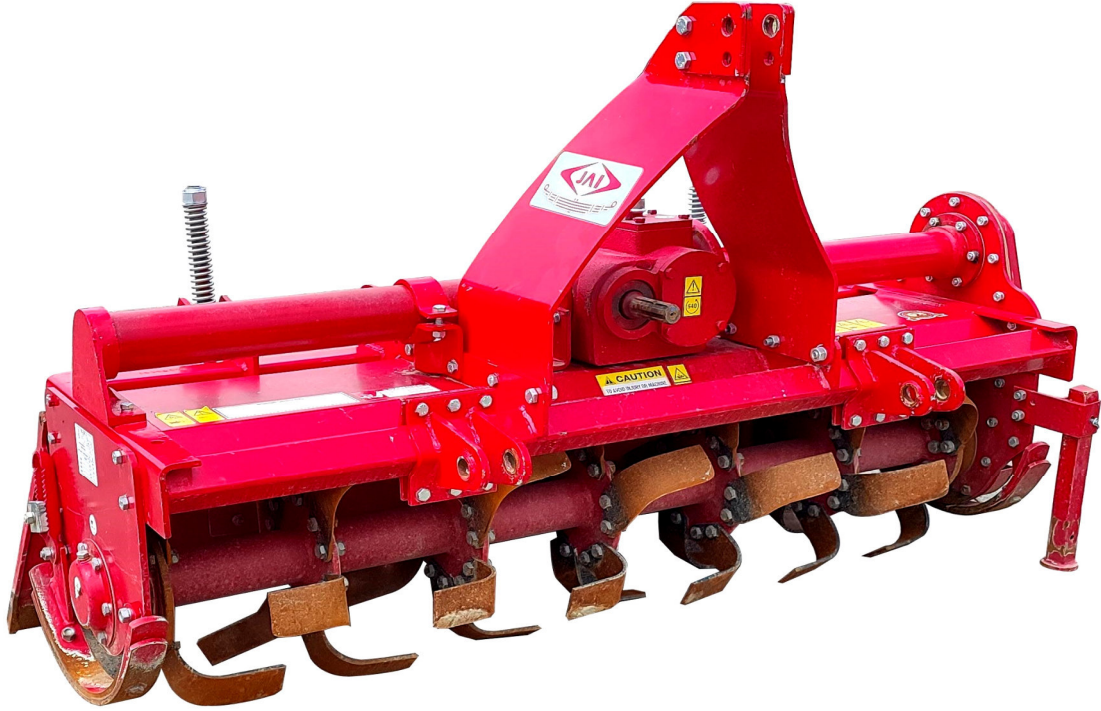

**JAMNA, JAIM4SR-5  
ROTARY TILLER, (ROTAVATOR) TRACTOR MOUNTED**



भारत सरकार

**Government of India**

कृषि एवं किसान कल्याण मंत्रालय

**Ministry of Agriculture and Farmers Welfare**

कृषि एवं किसान कल्याण विभाग

**Department of Agriculture and Farmers Welfare**

उत्तरी क्षेत्र कृषि मशीनरी प्रशिक्षण एवं परीक्षण संस्थान

**Northern Region Farm Machinery Training and Testing Institute**

ट्रैक्टर नगर, सिरसा रोड, हिसार, (हरियाणा) - 125 001

**Tractor Nagar, Sirsa Road, Hisar (Haryana)-125 001**

**[ISO 9001:2015 CERTIFIED]**

Website: <http://nrfmtti.gov.in/>

E-mail: [fmti-nr@nic.in](mailto:fmti-nr@nic.in)

Tele./FAX: 01662-276984

**6. FIELD PERFORMANCE TEST**

The field tests of the rotavator comprising of dry land and wet land operation were conducted for 26.44 and 10.54 hours respectively to assess the performance test which is reported in **Annexure-I & II** for dry land and wet land operation, respectively.

Observations of field performance test is summarized in the ensuing table:-

**Summary of Field Performance Test**

Sr. No.	Parameters/operations	Dry land operation	Wet land operation (Puddling)
<b>I</b>	<b>II</b>	<b>III</b>	<b>IV</b>
1.	Tractor used	Powertrac 445	
2.	Gear used	L-1	L-1
3.	Type of soil	Sandy loam	
4.	Average soil moisture (%)	13.9 to 17.2	--
5.	Average depth of standing water (cm)	--	11.2 to 11.8
6.	Bulk density of soil (g/cc)	1.51 to 1.61	--
7.	Average speed of operation (kmph)	2.51 to 3.08	2.55 to 2.67
8.	Avg. travel reduction (%)	--	1.48 to 2.69
9.	Avg. wheel slip (%)	-0.69 to -2.40	--
10.	Average depth of puddle (cm)	--	15.8 to 17.0
11.	Average depth of cut (cm)	10.06 to 10.98	--
12.	Avg. effective width (m)	1.37 to 1.40	--
13.	Area covered (ha/h)	0.278 to 0.351	--
14.	Time required for one ha (h)	2.85 to 3.60	--
15.	Field efficiency (%)	79.20 to 85.16	--
16.	Puddling index (%)	--	78.98 to 80.38
17.	Fuel consumption		
		l/h	3.20 to 3.61
		l/ha	9.14 to 12.59
18.	Avg. PTO power consumption, kW	14.20	--

**6.1 Dry land operation****6.1.1 Rate of work**

- i) The rate of work was recorded 0.278 to 0.351 ha/h, and the speed of operation varied from 2.51 to 3.08 kmph.
- ii) The time required to cover one hectare was recorded as 2.85 to 3.60 h

**6.1.2 Quality of work**

- i) The depth of operation was recorded as 10.06 to 10.98 cm.
- ii) Average effective width was observed as 137.0 to 140.0 cm.
- iii) Field efficiency was observed as 79.20 to 85.16 %.

**6.2 Wet Land operation****6.2.1 Quality of work**

- i) The depth of puddle was recorded as 15.8 to 17.0 cm.
- ii) The puddling index was recorded as 78.98 to 80.38 %.

**6.3 Labour requirement**

In all, two skilled operators are needed to ensure continuous operation of rotavator for day long period.

**6.4 Wear analysis (on mass basis)**

Wear of hatchet blades (on mass basis) was measured and recorded in ensuing table:

**Percentage wear of rotavator blades on mass basis**

Sr. No.	Initial mass of blade (g)	Mass of blade after 38.31 hrs. of operation (g)	Difference of weight (g)	Percentage of wear (%) after 38.31 hrs.	Percentage of wear on hour basis (%)
1.	949.8	931.2	18.6	1.96	0.051
2.	962.3	948.1	14.2	1.48	0.038
3.	976.5	962.2	14.3	1.46	0.038
4.	966.1	954.4	11.7	1.21	0.032
5.	973.0	963.3	9.7	0.99	0.026
6.	959.2	949.3	9.9	1.03	0.027
7.	976.9	967.7	9.2	0.94	0.025

**7. EFFECTIVENESS OF SEALINGS**

After completion of wet land operation for 10.54 hours, the rotavator was dismantled for checking the effectiveness of sealing provided against ingress of dust, and water/mud in various sub-assemblies/components. The observations are given in ensuing table:-

Sr. No.	Location	Whether ingress of mud and/or water was observed (Yes/No)
1.	Primary reduction gear box	No
2.	Secondary reduction gear box	No
3.	Rotor assembly (hub)	No

**8. EASE OF OPERATION & ADJUSTMENTS**

No noticeable difficulty was observed during the operation and adjustment of rotavator

**9. DEFECTS, BREAKDOWN AND REPAIRS**

No defect observed during the test.



**12. COMMENTS AND RECOMMENDATIONS**

**12.1** The Dimension of PIC of Implement does not conform, in toto, to the requirements of IS:10318-2002 and therefore, it may be looked into for corrective action.

**12.2 Technical Literature:**

One booklet entitled "Owner's manual" was provided for reference during test. The same, however, needs to be updated as per IS:8132-1999.

**TESTING AUTHORITY**

Er. SANJAY KUMAR AGRICULTURAL ENGINEER	
Dr. MUKESH JAIN DIRECTOR	 18.08.2022

The test report is compiled by Er. Ajay

**13. APPLICANT'S COMMENTS**

We will comply with during our regular production of the rotavator.